

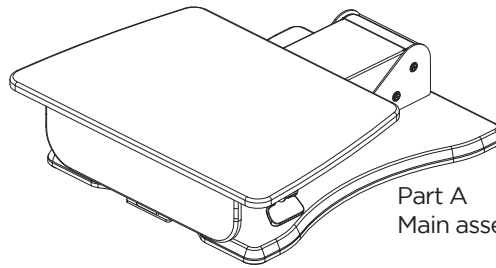


UPLIFT DESK[®]

Riser Standing Converter Instructions UDA100~riser

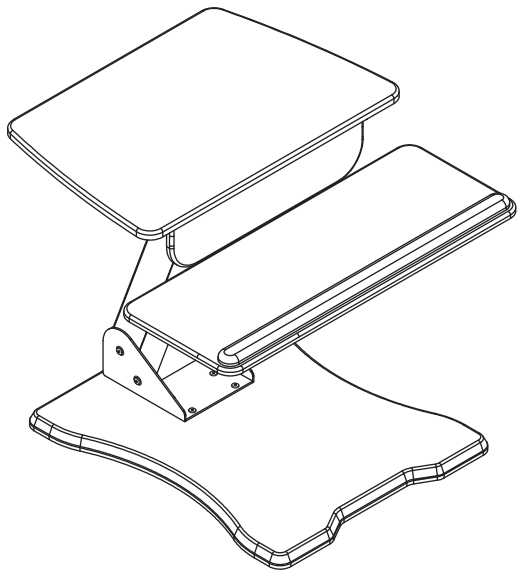

Part A
Main assembly

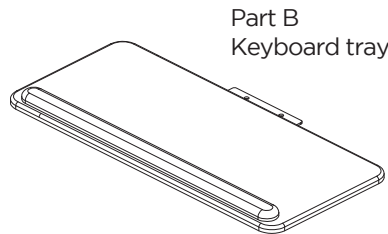

Part B
Keyboard tray



Part C
Allen wrench (large)




Part D
Allen wrench (small)



Part E
M6x10 bolts Qty. 2



Part F
Bolt covers Qty. 6




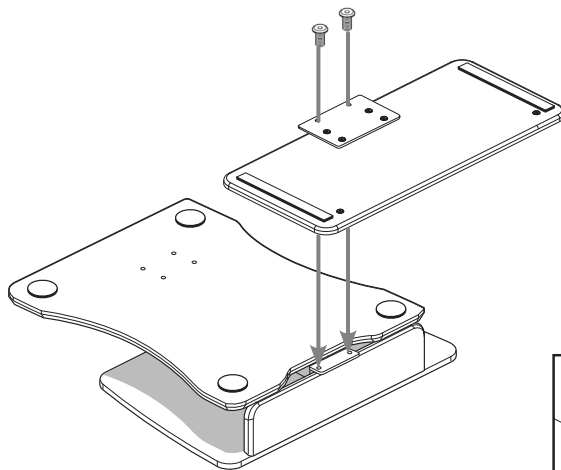


Step 1

Compare the parts you have with the list above. Place the Main assembly (Part A) upside down on a table.

Attach the Keyboard tray (Part B) using two M6x10 bolts (Part E), and tighten using the smaller Allen wrench (Part D), as shown to the left.


Use the self-adhesive Bolt covers (Part F) to cover the bolts, as shown below.

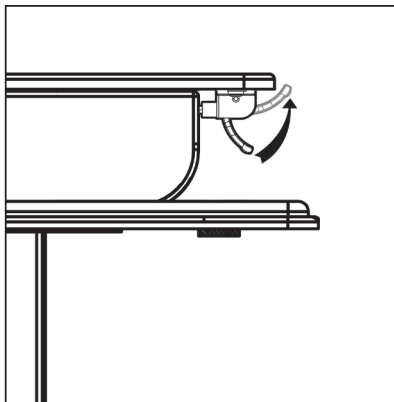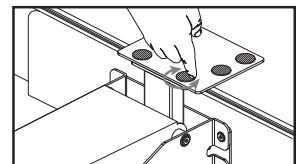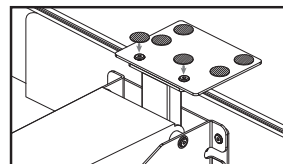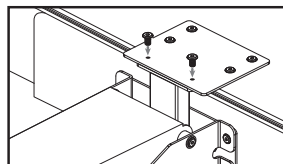


Step 2

With two people, lift and flip the Main assembly and place it on the table.

Adjust the height of the unit by squeezing the release paddle and moving to the desired position. Release the paddle to lock in place.


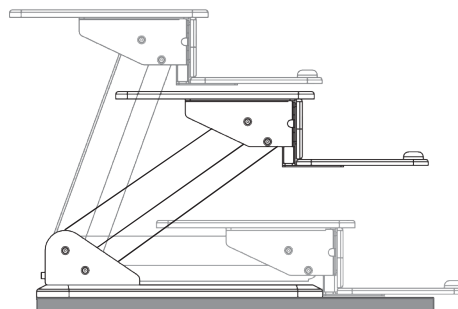


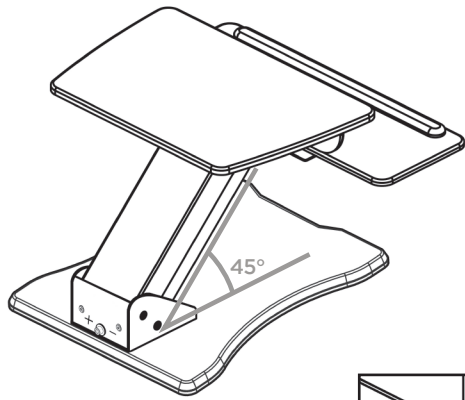

Step 3 (Optional)


This step is optional. We have pre-adjusted the tension for you. However, you may need to make adjustments once equipment, such as monitors and keyboards, are placed on the unit.

To adjust the lift to the exact amount of weight you place on it; squeeze the paddle then lower the unit until the main support column is at a 45° angle. Using the larger Allen wrench (Part C) and the tension adjustment bolt on the rear of the unit, adjust the tension for smooth operation. Turn clockwise to lessen the tension or counter-clockwise to increase it.

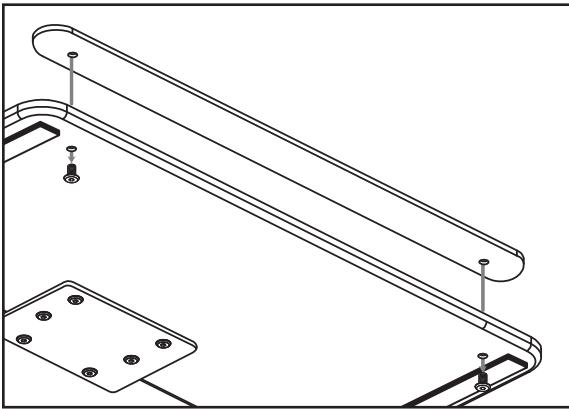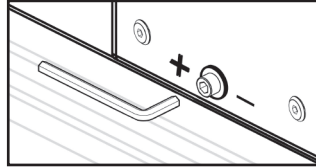

Step 4 (Optional)

If you prefer to use your UPLIFT Desk Riser Standing Converter without a wrist rest, remove the bolts beneath it using the smaller Allen wrench (Part D).

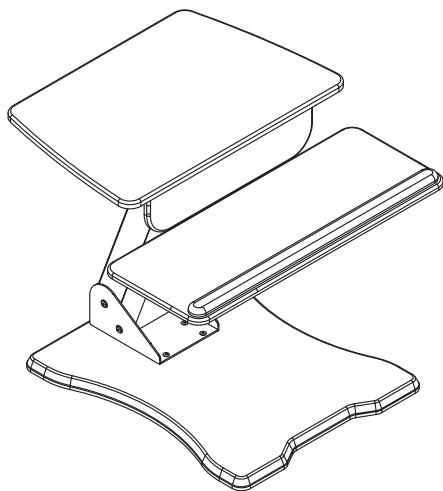

- The maximum load capacity of the UPLIFT Desk Riser Standing Converter is 28.6 lbs. Do not overload.
- Do not position the keyboard tray to hang over the edge of your desktop when in the lowest position. The keyboard tray is designed to rest ON the desktop to prevent tipping.
- Failing to follow these assembly instructions and safety precautions may result in personal injury.
- Failing to follow these assembly instructions and safety precautions voids your warranty and may result in property damage.

© **Copyright Notice:** This guide is a component of the UPLIFT Desk Riser Standing Converter. This guide is a part of the scope of delivery, even if the item is resold. This guide is also available on the UPLIFT Desk website: upliftdesk.com. Excerpts or copies may not be forwarded to third parties or used in any other published form without the prior written consent of UPLIFT Desk. These instructions are subject to United States copyright law.